Loss Solutions Group, LLC
Toll Free 866.899.8756
Fax 860.639.5158
www.LossSolutionsGroup.com

February 18, 2026

Ms. Solangye Ruiz
Travelers Insurance
P.O. Box 430
Buffalo, NY 14240

RE:	Insured:	Denver Meyers
	Claim Number:	I6D2002
	LSG Matter Number:	787200.12859-00
	Date of Loss:	June 22, 2025

Dear Ms. Ruiz,

Thank you for choosing Loss Solutions Group as your equipment loss consultant. This report provides an analysis of the above-referenced claim.

Assignment:

Loss Solutions Group was contacted by Ms. Solangye Ruiz of Travelers Insurance. The scope of this assignment was to assess the extent of damage, costs, and salvage value associated with the insured's three (3) ton Carrier-branded residential heat-pump style HVAC system. The equipment sustained damage during a lightning strike event on June 22, 2025.

Findings and Analysis:

Loss Solutions Group contacted the insured, Mr. Denver Meyers (256-424-2519), to discuss our role in the claim. Mr. Meyers explained that a lightning strike triggered the building's fire alarm system due to its intensity, prompting a response from the fire department and the fire chief to ensure safety. We received two (2) estimates: the first (Estimate #53582712) was for attempted repairs, while the second (Estimate #52343758) was for a full HVAC system replacement. Although the repair option was available, the HVAC company advised that it would require additional work to identify lingering issues, and they most likely would need to return multiple times to address all unresolved problems. Given the age of the equipment, Mr. Meyers ultimately decided to proceed with the replacement.

Loss Solutions Group contacted the insured's HVAC vendor, Anytime Heating & Cooling, LLC (256-714-8463), and spoke with Ms. Ashley Torrez to discuss the claimed event and their proposals. Ms. Torrez explained that they found severe damage caused by a lightning strike. The insured

© 2022 by Loss Solutions Group, LLC. All rights reserved.

requested both a repair option and a replacement quote. In response, they provided an initial quote for repairs, noting that additional work and extra visits would likely be needed to ensure the insured's approximately fourteen (14)-year-old system continues to function properly. They recommended the replacement option to ensure the insured can be up and running in one (1) day, rather than having to track down lingering issues with an older unit.

A total amount of $13,900.00 was presented.

Scope of Damage

Loss Solutions Group submits that the insured's three (3) ton Carrier-branded residential heat-pump style HVAC system sustained damage during a lightning strike event on June 22, 2025.

Age & Condition

Loss Solutions Group was provided with photographs of the unit and its nomenclature nameplate. We submit that the unit was around fourteen (14) years old and in average condition at the time of the claimed event.

Reparability

Loss Solutions Group has reviewed the provided information and discussed the damage with the vendor involved. We submit that the proposed replacement path is warranted given the extent of damage reportedly sustained during the claimed event.

Cost Analysis

Loss Solutions Group assessed the proposed costs by cross-referencing with alternative vendors, drawing on historical data for similar repairs, evaluating comparable equipment pricing, and consulting directly with the involved vendor to verify reasonableness.

ANYTIME HEATING & COOLING, LLC (256-714-8463) ESTIMATE # 52343758

Loss Solutions Group reviewed the proposal presented by Anytime Heating & Cooling totaling $13,900.00.

Included in the cost is an amount for a Ruud-branded three (3) ton heat pump HVAC condenser unit, air handling unit and coil, drain pan for the evaporator unit, a new condenser pad, thermostat and thermostat wire, electric whip, duct transitions, copper tubing and fittings, and brazing materials. We submit that these components are required to complete the replacement, and the costs are fair and reasonable.

Loss Solutions Group has reviewed the labor costs for the vendor to diagnose the damage and to perform the replacement. We submit that these amounts are fair and reasonable to complete the scope of work as presented to us.

© 2022 by Loss Solutions Group, LLC. All rights reserved.

RCV

Loss Solutions Group submits an amount of $13,900.00 (RCV) as being fair and reasonable to return the insured to a pre-loss condition. A further breakdown of the pricing is available in the attached spreadsheet.

Salvage

Loss Solutions Group submits that there is little to no salvage value associated with this claimed event.

Summary:

Loss Solutions Group's findings herein are based upon all information that was available at the time of this writing. The opinions are based upon reviewed documentation, interviews, research, experience, historical references, training and education.

1. The insured, Denver Meyers, reported that their three (3) ton Carrier-branded residential heat-pump style HVAC system sustained damage during a lightning strike event on June 22, 2025. A total amount of $13,900.00 was presented.

2. Loss Solutions Group was provided with photographs of the unit and its nomenclature nameplate. We submit that the unit was around fourteen (14) years old and in average condition at the time of the claimed event.

3. Loss Solutions Group has reviewed the provided information and discussed the damage with the vendor involved. We submit that the proposed replacement path is warranted given the extent of damage reportedly sustained during the claimed event.

4. Loss Solutions Group submits an amount of $13,900.00 (RCV) as being fair and reasonable to return the insured to a pre-loss condition. A further breakdown of the pricing is available in the attached spreadsheet.

5. Loss Solutions Group submits that there is little to no salvage value associated with this claimed event.

© 2022 by Loss Solutions Group, LLC. All rights reserved.

If you have any questions or if you need any additional information, please feel free to contact Tanner Beuret at (866) 899-8756 ext. 755, or via email at tbeuret@losssolutionsgroup.com. Team Leader Nick Ramos can be reached at (866) 899-8756 ext. 724, or via email at nramos@losssolutionsgroup.com.

Best regards,

Tanner Beuret
Technical Consultant
Loss Solutions Group, LLC

© 2022 by Loss Solutions Group, LLC. All rights reserved.

INSURED: DENVER MEYERS
LSG MATTER #: 787200.12859-00
CLAIM #: I6D2002
DATE OF LOSS: 6/22/2025
CAUSE OF LOSS: LIGHTNING STRIKE

ANYTIME HEATING & COOLING, LLC (256-714-8463) ESTIMATE # 52343758											
REF #	ITEM	CLAIM PRESENTED			LSG RESEARCHED RCV			AGE (YEARS)	USEFUL LIFE (YEARS)	CONDITION	NOTES
		QTY	UNIT COST	TOTAL	QTY	UNIT COST	TOTAL				
1	3 TON SPLIT SYSTEM REPLACEMENT	1	$ 13,900.00	$ 13,900.00	0	$ -	$ -	N/A	N/A	N/A	RUUD BRANDED THREE (3) TON FIFTEEN (15) SEER HEAT PUMP STYLE SPLIT SYSTEM REPLACEMENT. THIS COST WAS GIVEN TO US IN A LUMP SUM COST. WITH HELP FROM THE VENDOR WE WERE ABLE TO BREAK THIS COST DOWN AS FOLLOWS.
2	3 TON RUUD HEAT PUMP STYLE SYSTEM	0	$ -	$ -	1	$ 7,100.00	$ 7,100.00	14	20	AVERAGE	RUUD 3 TON 15 SEER HEAT PUMP SYSTEM. WITH AN ADDED VENDOR MARK UP ON MATERIALS.
3	DRAIN PAN	0	$ -	$ -	1	$ 200.00	$ 200.00	14	20	AVERAGE	METAL INDOOR DRAIN PAN FOR UNDERNEATH THE EVAPORATOR.
4	CONDENSER PAD	0	$ -	$ -	1	$ 200.00	$ 200.00	14	20	AVERAGE	PLASTIC CONDENSER PAD TO FIT THE NEW UNIT.
5	THERMOSTAT AND THERMOSTAT WIRE	0	$ -	$ -	1	$ 350.00	$ 350.00	14	20	AVERAGE	NEW THERMOSTAT AND THERMOSTAT WIRE. WITH ADDED VENDOR MARK UP ON MATERIALS.
6	ELECTRICAL WHIP AND DISCONNECT	0	$ -	$ -	1	$ 350.00	$ 350.00	14	20	AVERAGE	NEW ELECTRICAL WHIP FOR THE CONDENSER ALONG WITH AN ELECTRICAL DISCONNECT. PLUS SOME WIRE AND MATERIALS FOR THE INSIDE UNIT.
7	DUCT TRANSITIONS	0	$ -	$ -	1	$ 300.00	$ 300.00	14	20	AVERAGE	DUCT TRANSITIONS TO FIT THE NEW AIR HANDLER.

© 2022 by Loss Solutions Group, LLC. All rights reserved.

INSURED: DENVER MEYERS
LSG MATTER #: 787200.12859-00
CLAIM #: I6D2002
DATE OF LOSS: 6/22/2025
CAUSE OF LOSS: LIGHTNING STRIKE

ANYTIME HEATING & COOLING, LLC (256-714-8463) ESTIMATE # 52343758												
REF #	ITEM	CLAIM PRESENTED			LSG RESEARCHED RCV			AGE (YEARS)	USEFUL LIFE (YEARS)	CONDITION	NOTES
		QTY	UNIT COST	TOTAL	QTY	UNIT COST	TOTAL				
8	COPPER INSULATION, TAPE, DUCT INSULATION, ETC.	0	$ -	$ -	1	$ 200.00	$ 200.00	14	20	AVERAGE	COPPER TUBING INSULATION, DUCT TAPE, INSULATION FOR THE DUCTING, ETC.
9	COPPER FITTINGS, CONNECTIONS, AND TUBING.	0	$ -	$ -	1	$ 300.00	$ 300.00	14	20	AVERAGE	COPPER FITTINGS, CONNECTIONS, AND TUBING.
10	BRAZING EQUIPMENT AND MATERIALS	0	$ -	$ -	1	$ 300.00	$ 300.00	N/A	N/A	N/A	BRAZING RODS, TORCH, GAS, ETC.
11	REMOVAL AND DISPOSAL OF EQUIPMENT	0	$ -	$ -	1	$ 200.00	$ 200.00	N/A	N/A	N/A	RECYCLING AND DISPOSAL OF THE OLD EQUIPMENT.
12	PERMITS	0	$ -	$ -	1	$ 400.00	$ 400.00	N/A	N/A	N/A	PERMITS
13	LABOR HOURS	0	$ -	$ -	20	$ 200.00	$ 4,000.00	N/A	N/A	N/A	LABOR HOURS FOR TWO TECHNICIANS FOR TEN HOURS EACH.
SUB-TOTAL				**$ 13,900.00**			**$ 13,900.00**				
SALES TAX				$ -			$ -				
TOTAL				**$ 13,900.00**			**$ 13,900.00**				

© 2022 by Loss Solutions Group, LLC. All rights reserved.

INSURED: DENVER MEYERS
LSG MATTER #: 787200.12859-00
CLAIM #: I6D2002
DATE OF LOSS: 6/22/2025
CAUSE OF LOSS: LIGHTNING STRIKE

ANYTIME HEATING & COOLING, LLC (256-714-8463) ESTIMATE # 52343758											
REF #	ITEM	CLAIM PRESENTED			LSG RESEARCHED RCV			AGE (YEARS)	USEFUL LIFE (YEARS)	CONDITION	NOTES
		QTY	UNIT COST	TOTAL	QTY	UNIT COST	TOTAL				
	TOTAL PRESENTED			$ 13,900.00							

TOTAL RESEARCHED RCV	$ 13,900.00

© 2022 by Loss Solutions Group, LLC. All rights reserved.

Estimate 52343758
Estimate Date 9/10/2025

Billing Address
Denver Meyers
121 Mystic Arbor Drive
Harvest, AL 35749 USA

Job Address
Denver Meyers,
121 Mystic Arbor Drive
Harvest, AL 35749 USA

Service #	Description	Quantity
SO - 117	10 Years Parts and Labor Warranty	1.00
SO - 101	DRAIN PAN	1.00
SO - 104	PAD	1.00
SO - 103	PERMIT	1.00
SO - 110	REMOVAL AND DISPOSAL OF EQUIPMENT	1.00
SO - 100	THERMOSTAT	1.00
SO - 107	WHIP	1.00
SO - 124	24/7 ANYTIME Service	1.00
SO - 119	Anytime Satisfaction Guarantee for 1 year	1.00
SO - 118	Complimentary 1 year Maintenance Plan	1.00
SO - 121	Clean up Real Nice! Promise	1.00
SO - 125	No Hidden Costs Guarantee	1.00
SO - 120	Property Protection Promise	1.00
HPC - 1011	10 YEAR PARTS AND LABOR WARRANTY WITH 24/7/365 COVERAGE	1.00
AH - 1175	Air Handler - 15 Seer - 3 TON	1.00

Sub-Total	$13,900.00
Tax	$0.00
Total Due	$13,900.00
Deposit/Downpayment	$0.00
Est. Financing	$316.06

Date 9/10/2025

Anytime Heating and Cooling, LLC
3006 11th Avenue, Huntsville, Alabama 35805
United States
256-714-8463

Estimate 53582712
Estimate Date 9/30/2025

Billing Address
Denver Meyers
121 Mystic Arbor Drive
Harvest, AL 35749 USA

Job Address
Denver Meyers,
121 Mystic Arbor Drive
Harvest, AL 35749 USA

Service #	Description	Quantity	Standard Price	Your Price	Total
AH - 503	BLOWER MOTOR PSC 1.5-3 ton	1.00	$1,297.26	$1,102.67	$1,102.67
ODU - 402	REPLACE DEFROST BOARD	1.00	$682.00	$579.70	$579.70
ODU -102	CAPACITOR	1.00	$394.00	$334.00	$334.00
AH - 209	LOW VOLTAGE SHORT LOCATE AND REPAIR	1.00	$533.00	$453.00	$453.00
ODU - 700	CONTACTOR	1.00	$394.00	$334.00	$334.00
AH - 203	Replace Fan Control Board	1.00	$797.00	$677.00	$677.00
ODU - 303	Compressor Replacement Remove and Dispose of Old Compressor Install New Compressor 1 Year Part 1 Year Labor	1.00	$3,854.00	$3,275.90	$3,275.90

Member Savings $1,194.99

Sub-Total	$6,756.27
Tax	$0.00
Total Due	$6,756.27
Deposit/Downpayment	$0.00
Est. Financing	$153.63

Thank you for choosing Anytime Heating and Cooling, LLC

THIS IS AN ESTIMATE, NOT A CONTRACT FOR SERVICES. The summary above is furnished by Anytime Heating and Cooling, LLC as a good faith estimate of work to be performed at the location described above and is based on our evaluation and does not include material price increases or additional labor and materials which may be required should unforeseen problems arise after the work has started. I understand that the final cost of the work may differ from the estimate, perhaps materially. THIS IS NOT A GUARANTEE OF THE FINAL PRICE OF WORK TO BE PERFORMED. I agree and authorize the work as summarized on these estimated terms, and I agree to pay the full amount for all work performed.

32

AND
TSVILLE
A T E D
.com
NO. 1000 CART
NEVER PUSH
TRAILER
Ronaldo
9C

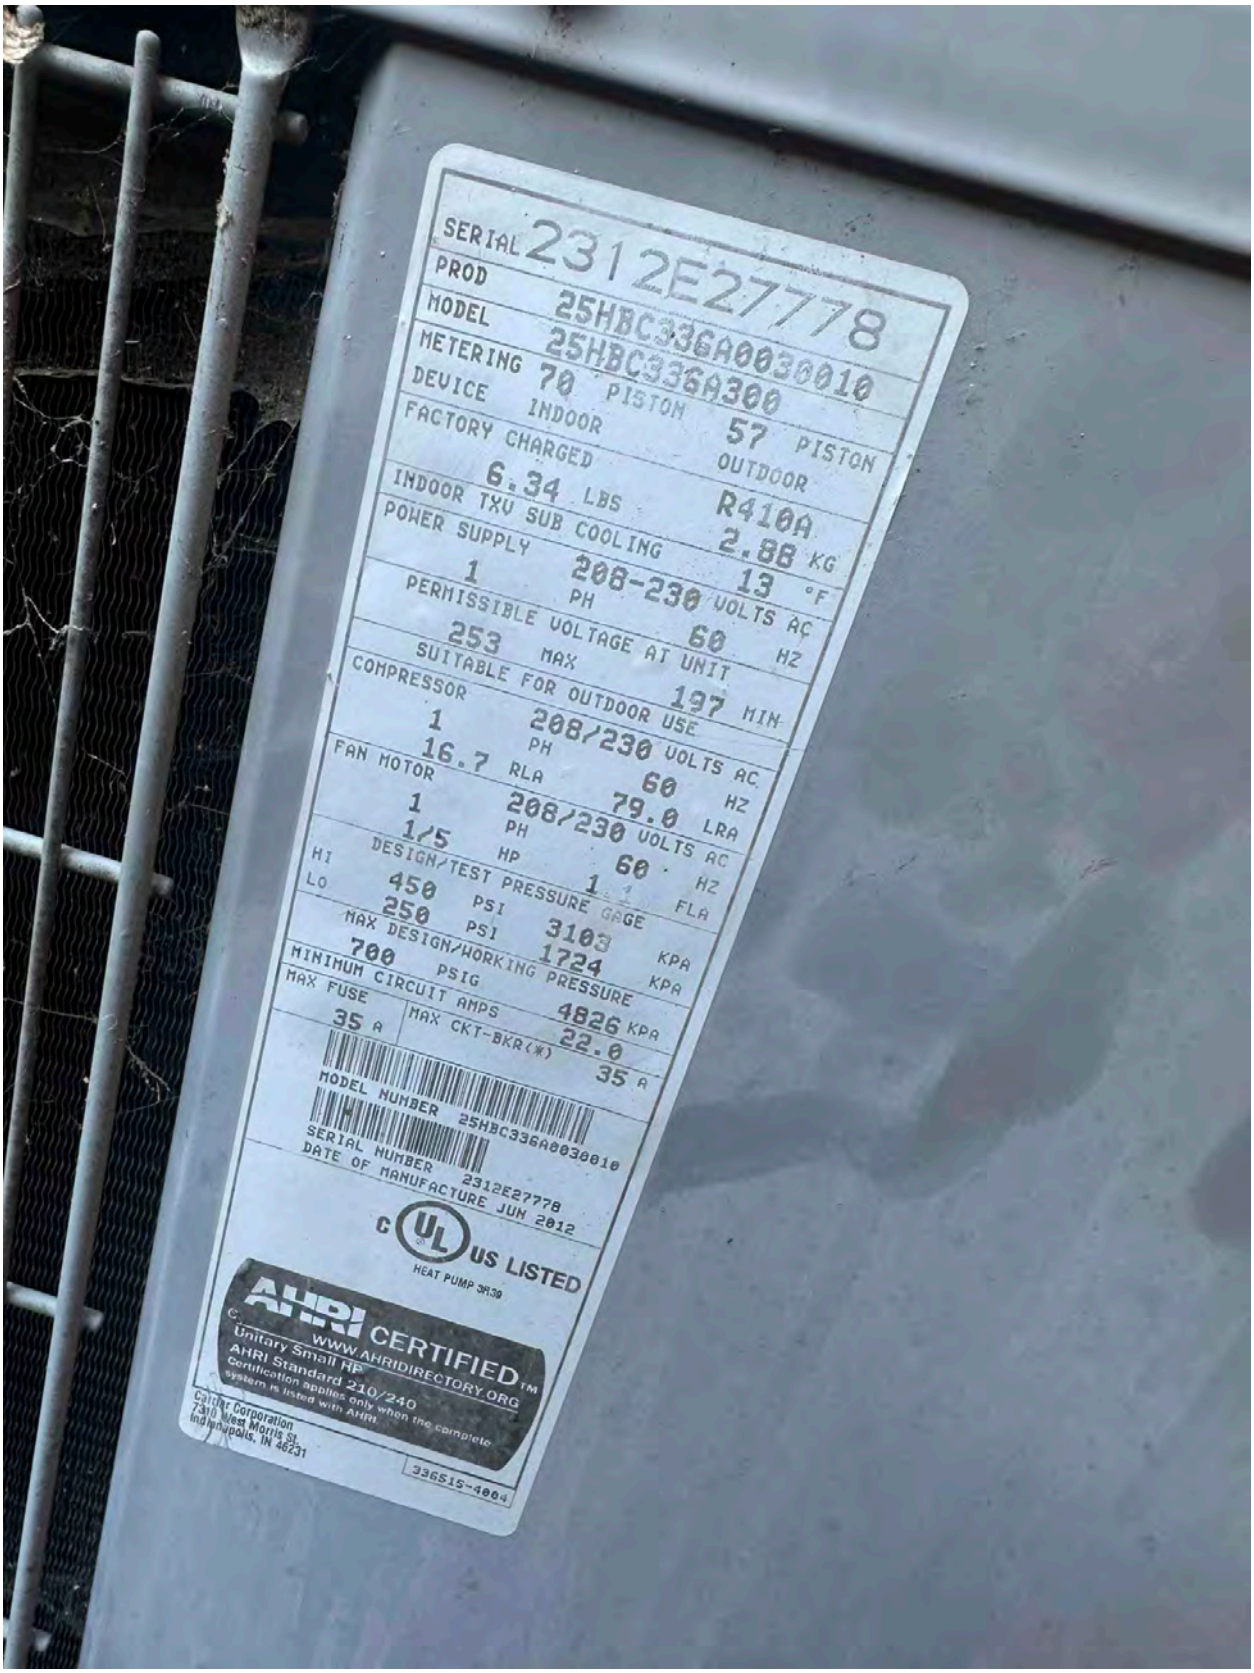
SERIAL 2312E27778
PROD 25HBC336A0030010
MODEL 25HBC336A300
METERING DEVICE
INDOOR 70 PISTON
OUTDOOR 57 PISTON
FACTORY CHARGED 6.34 LBS R410A 2.88 KG
INDOOR TXV SUB COOLING 13 °F
POWER SUPPLY 1 PH 208-230 VOLTS AC 60 HZ
PERMISSIBLE VOLTAGE AT UNIT 253 MAX 197 MIN
SUITABLE FOR OUTDOOR USE
COMPRESSOR 1 PH 208/230 VOLTS AC 60 HZ
16.7 RLA 79.0 LRA
FAN MOTOR 1 PH 208/230 VOLTS AC 60 HZ
1/5 HP 1.1 FLA
DESIGN/TEST PRESSURE GAGE
HI 450 PSI 3103 KPA
LO 250 PSI 1724 KPA
MAX DESIGN/WORKING PRESSURE 700 PSIG 4826 KPA
MINIMUM CIRCUIT AMPS 22.0
MAX FUSE 35 A
MAX CKT-BKR(*) 35 A
MODEL NUMBER 25HBC336A0030010
SERIAL NUMBER 2312E27778
DATE OF MANUFACTURE JUN 2012
C UL US LISTED
HEAT PUMP 3R30
AHRI CERTIFIED™
WWW.AHRIDIRECTORY.ORG
Unitary Small HP
AHRI Standard 210/240
Certification applies only when the complete system is listed with AHRI.
Carrier Corporation
7310 West Morris St.
Indianapolis, IN 46231
336515-4004

HEATER VA: 1.7
DISCONNECT PER NEC
COMPONENT ARRANGEMENT
LEGEND
PRODUCT NO.
MODEL NO. FB4CNF036T00A8AA
SERIAL NO. FB4CNF036
VOLTS 1212A67673
MOTOR HP 208/230
MOTOR FLA 1/2
PHASE/HERTZ 4.1
TEST STATIC 1/60
REFRIGERANT 410A 0.2 IN. W.C.
DATE OF MANUFACTURING DESIGN PSIG 450
MAR 2012
LISTED
APPROVED ACCESSORIES
KFCEH**01C05
KFCEH**01N10
KFCEH**01F20
KFCEH**01N08
KFCEH**01C10
KFCEH**01C20
KFCEH**01C08
KFCEH**01F15
KFCEH**01N05
KFCEH**01N09
KFCEH**01C15
** – NUMERIC
ELECTRICAL INFORMATION FOR THIS UNIT
FOR FIELD INSTALLED ELECTRIC HEATERS APPLY ELECTRICAL INFORMATION PLATE SUPPLIED WITH HEATER IN THIS BLOCK.
L1/L2 HEATER AMPS 0 SINGLE SUPPLY CIRCUIT
MAX. OVERCUR. PROTECTION 15 MIN. AMPACITY 5.1
L1/L2 HEATER AMPS N/A DUAL SUPPLY CIRCUIT
MAX. OVERCUR. PROTECTION N/A MIN. AMPACITY N/A
L3/L4 HEATER AMPS N/A
MAX. OVERCUR. PROTECTION N/A MIN. AMPACITY N/A
HEAT PACK INSTALLED N/A
CAUTION
INSTALLER: APPLY THIS INFORMATION PLATE OVER SPACE INDICATED ON DOOR RATING PLATE. SEE INSTALLATION INSTRUCTIONS FOR 11" CLEARANCE REQUIREMENTS.
SUPPLY CIRCUIT
HEATER AMPS
SUPPLY CIRCUIT
HEATER AMPS
HEAT PACKAGE IN THIS UNIT KFCEH2001C15

SupplyHouse

Plumbing | Heating | HVAC | Electrical | PEX | Pipe | Fittings | Valves | Tools | Resources | Our Team

TRADEMASTER PROGRAM FOR THE PROS — ARE YOU A PRO? Join for FREE!

VisionPRO 8000 with RedLINK technology, Programmable, 1H/1C, Touchscreen Thermostat, TH8110R1008

Brand: Honeywell Home SKU: TH8110R1008

$241.64 each

ADD TO CART

In Stock Get 46 Tomorrow, Feb 13

Total Available: 364

MANUALS (7)

- Brochure
- Product Overview
- Specification Sheet
- Install Instructions
- Quick Start Guide
- User Guide
- Competitive Cross Reference

This item replaces: TH8110U1003, PSP711TS

Free Shipping This item ships free

Easy Returns No restocking fee for 90 days

Product Highlights

- 7 Day, Programmable
- 24V, 750mV
- 1 Heat/1 Cool
- Horizontal
- Premier White
- 5 Year Warranty

Bulk refrigerant pricing + 5% off — use REFRIG5

Get Quote

voomi supply made easy ★★★★★ 4.7

Search by product, brand or SKU

Contact us — Live Chat: Online Now — Sign In — Cart

HVAC Equipment | Ductless Mini Splits | HVAC Parts & Supplies | Air Quality | Plumbing | Electrical | Tools & Supplies | Pool | Voomi Rewards

Ruud RP15AY30AJ2NA Endeavor Line Achiever Plus Series Heat Pump 30000 Btu/Hr

Brand: RUUD SKU: RP15AY30AJ2NA

Availability: In Stock — Ships via Freight in 1-3 Business Days

Earn 16,944 VoomiPRO Credits when you buy this item.

Quantity: 1

$5,648.17

From $273.86/mo or 0% APR with shop pay. Check your purchasing power

ADD TO CART

Buy with shop

More payment options

LTL Delivery

This product weighs 202 lbs each and will be shipped via LTL carrier. A lift gate option will be added free of charge for your convenience.

HAVE A QUESTION? Our team is ready to help! Chat Email 215-326-9845

Rewards

30 DAY

theacoutlet.

Order Online or Call (888) 474 - 9966

Mon - Fri 9:00am - 3:00am EST - Se Habla Español
Sat - Sun 9:00am - 6:00pm EST

Track Your Order Contact About Us

MY ACCOUNT SHOPPING CART 0 Items

"Your Trusted Online HVAC Wholesaler for Over 15 Years"

SHOP BY CATEGORY | SHOP BY BRAND | PREFERRED CUSTOMERS | RETURNS | CLAIMS | WARRANTY | SEER2 INFO | R32/R454 Information

Home / Ruud Endeavor by Rheem 3 Ton 14.8 SEER2 R-454B 40,000 Btu 92% Afue Two-Stage Dual Fuel System

Ruud Endeavor by Rheem 3 Ton 14.8 SEER2 R-454B 40,000 Btu 92% Afue Two-Stage Dual Fuel System

Model: RP14AY36AJ2NA - RCFY3617STANM - R921T0403A17M4SNAS

$5,421.00

~~$10,842.00~~

0% APR

or as low as $339/mo.

SEE WHAT YOU CAN SPEND WITH affirm

Starting at **$282.34/mo** with Breeze

No credit needed! Price does not include taxes/fees and is only an estimate calculation.

See if you qualify

In Stock

QTY: − 1 + ADD TO CART

Free Shipping

110% Price Match Guarantee

Required Options:

- Furnace Position *
- Freight Fuel Surcharge *
- Would you like to add an Extended Labor Warranty? (Currently Unavailable in California or Florida)
- Prepaid No-Hassle Shipping
- Line Set

View More Options

Get $50 Off

Accessories

Contact us!

SupplyHouse.com

Search for a product, brand, or SKU...

CONTACT & SUPPORT • Live Chat: Online Now

SIGN IN CART

Plumbing | Heating | HVAC | Electrical | PEX | Pipe | Fittings | Valves | Tools | Resources | Our Team

TRADEMASTER PROGRAM FOR THE PROS

ARE YOU A PRO? Join for FREE! Free Shipping | Lower Prices | Free Returns | APPLY NOW | Less than 3 minutes!

Hover image to zoom

Home > Heating Supplies & Parts > Pipe Insulation > K-Flex Pipe Insulation

1-1/8" Pipe (O.D.) x 1" Wall Titan Pipe Insulation, 6'

Brand: K-Flex SKU: 6RSR100118 (0) Q&A: (0)

− + **$51.24** each

ADD TO CART

In Stock Get 11 Tue, Jun 4

FastTrack
Order today, receive Tuesday
Details

TurboTrack
Order today, get by 12PM Tomorrow
Time Slots

MANUALS (1)

Product Overview

Free Shipping On orders over $99

Easy Returns No restocking fee for 90 days

Product Highlights

1" | 72" Length | 3-1/8"

REBATE CENTER

SCRATCH, DENT, OR CLOSE OUT SPECIALS

COMPLETE SPLIT SYSTEMS (INDOOR/OUTDOOR)

MINI SPLIT DUCTLESS SYSTEMS WITH REMOTE

PACKAGE / MOBILE HOME / ROOFTOP UNIT

BARD WALL HUNG PACKAGE UNIT

COMMERCIAL

Home > Copper Lines & Fittings >

Copper Fittings Kit 1 3/8 & 5/8

Larger Photo Email A Friend

Like 0 Share

List Price: $180.00
Our Price: $155.00
You save $25.00!

Starting at $14/mo with affirm.
See if you qualify

Availability: Usually Ships in 2 to 3 Business Days
Product Code: 37128

Qty: 1

Add To Cart

Add To Wishlist

Master Flow 14 in. x 20 in. to 14 in. Square to Round Transition

Size: 14 in. X 20 in /...

- Made from galvanized steel
- Half inch flange
- Install with sheet metal screws (not included)
- Always seal and insulate ductwork for greater system efficiency and comfort

Product details

Used as a transition from air handler unit to air supply duct run. Connect to Round Duct Pipe or Flexible Ductwork. Flange allows user to secure unit to flat surface.

Buying options

About these results

$100.10
+$8.26 est. tax
Free delivery
90-day returns
Home Depot
Top Quality Store · 4.5/5 (1.8K)
PayPal accepted
Visit site

$125.10
+$10.32 est. tax
Free delivery
Free 30-day returns
eBay - luckyluciano711
PayPal, Google Pay accepted
Visit site
Buy now

Typical prices across the web

$100.10 at Home Depot

Low $100.10 $125.10 High

Report a listing

theacoutlet

(888) 474 - 9966

Daikin 5 Ton 14 Seer Commercial Heat Pump (208/230V)

Model: DZ14SA0603A

$3,305.00

Starting at $207/mo or 0% APR with affirm.

QTY: 1 ADD TO CART

ACCESSORIES | DESCRIPTION | SPECIFICATIONS | DOCUMENTS | CUSTOMER REVIEWS

Anti-Vibration Rubber Pads

Model: ISO-2

$24.95

QTY: 1 ADD TO CART

Flexible Electric Supply Whip (1/2 in x 6 ft)

Model: B4136

$34.95

QTY: 1 ADD TO CART

Flexible Electric Supply Whip (3/4 in x 6 ft)

Model: B4138

$46.95

QTY: 1 ADD TO CART

ProStat Non-Programmable Thermostat (1H/1C)

Model: PRS3110

$64.95

QTY: 1 ADD TO CART

amazon | Delivering to Southlake 76092 Update location | Tools & Home Improvement | Search Amazon | EN | Hello, sign in Account & Lists | Returns & Orders | 0 Cart

All | Medical Care | Groceries | Best Sellers | Amazon Basics | New Releases | Prime | Music | Customer Service | Today's Deals | Amazon Home | Celebrate National Small Business Month

Tools & Home Improvement | Best Sellers | Deals & Savings | Gift Ideas | Power & Hand Tools | Lighting & Ceiling Fans | Kitchen & Bath Fixtures | Smart Home | Shop by Room | Launchpad | Amazon Business

5ft Ultra Thin Extension Cord with Charger, by TESSAN... 2,226 -26% $16.99 ~~$22.99~~ prime

Sponsored

Tools & Home Improvement › Electrical › Breakers, Load Centers & Fuses › Accessories › Safety Switches

Roll over image to zoom in

Siemens GNF322RA 60-Amp, 3-Pole, 240V General Duty Compact Series Safety Switch, Non-Fusible, Outdoor

Visit the SIEMENS Store

4.5 ★★★★☆ 90 ratings

Amazon's Choice in Circuit Breaker Panel Safety Switches by SIEMENS

300+ bought in past month

-22% $69.99

List Price: ~~$89.35~~

FREE Returns

Get $10 off instantly: Pay $59.99 ~~$69.99~~ upon approval for the Amazon Store Card. No annual fee.

Available at a lower price from other sellers that may not offer free Prime shipping.

- 240-Volt rated, 3-Pole 3-Wire
- Quick make-break action
- Metal handle
- Provision for ECHA type hub
- Compact size for reduced space requirements

› See more product details

Customer ratings by feature

prime

Enjoy fast, free delivery, exclusive deals, and award-winning movies & TV shows with Prime

Try Prime and start saving today with **fast, free delivery**

Delivery | Pickup

$69.99

FREE Returns

FREE delivery **Saturday, May 25**

Or fastest delivery **Tuesday, May 21**. Order within 6 hrs 22 mins

Delivering to Southlake 76092 - Update location

Only 1 left in stock - order soon.

Add to Cart

Buy Now

$5.00 OFF SHIPPING W/ CODE SHIP4LESS

LENNOX

70X5001 - Plastic AC Pad Size 36"x36"x3"

(No reviews yet)

Model #70X50

$109.65

~~$324.05~~ Save $214.40

Qty: − 1 + ADD TO CART

Expert Resources & Support

Need help? We have an expert team of pro's to assist you.

Video Advice Contact Us