Loss Solutions Group, LLC
Toll Free 866.899.8756
Fax 860.639.5158
www.LossSolutionsGroup.com

February 10, 2026

Ms. Teri Tucker
Hanover Insurance
PO Box 15147
Worcester, MA 01615

RE:	Insured:	Spare Time Inc.
	Claim Number:	85-00893419
	LSG Matter Number:	426600.4162-00
	Date of Loss:	December 24, 2025

Dear Ms. Tucker,

Thank you for choosing Loss Solutions Group as your equipment loss consultant. This report provides an analysis of the above-referenced claim.

Assignment:

Loss Solutions Group was contacted by Ms. Teri Tucker of Hanover Insurance. The scope of this assignment was to assess the extent of damage and salvage value associated with the insured's two (2) Trane-branded ten (10) ton packaged HVAC units that sustained damage during a vandalism/theft event on December 24, 2025.

Findings and Analysis:

Loss Solutions Group contacted the insured, Mr. Chris Vandyke with Spare Time Inc. (209-371-9839), to discuss his role in the claim. Mr. Vandyke explained how vandals gained access to his ground-mounted packaged HVAC units and dismantled them of their valuables. Lastly, he stated that this was the first vandalism event and that he had another event two (2) days later on December 26, 2025.

Loss Solutions Group contacted the insured's HVAC vendor, Iron Mechanical (916-347-6292), and spoke with Mr. Michael Dobkin to discuss the claimed event and their repairs. The vendor reported that they arrived to find two (2), ten (10) ton Trane ground mounted rooftop units (RTUs) had been stripped of their valuable copper and electrical equipment, requiring full replacement of the two (2) RTUs (RTU 1-G and 1-H).

A total amount of $70,641.00 was presented.

© 2022 by Loss Solutions Group, LLC. All rights reserved.

Scope of Damage

Loss Solutions Group submits that the insured's two (2) Trane-branded ten (10) ton packaged HVAC units sustained extensive damage during a vandalism/theft event on December 24, 2025.

Age & Condition

The insured reported that the affected equipment was around twenty (20) years old and in average condition at the time of the claimed event.

Cost Analysis

Loss Solutions Group assessed the proposed costs by cross-referencing with alternative vendors, drawing on historical data for similar repairs, evaluating comparable equipment pricing, and consulting directly with the involved vendor to verify reasonableness.

IRON MECHANICAL (916-347-6292) ESTIMATE # 25-SP-495 (REPLACEMENT OF RTU 1-G & 1-H)

Loss Solutions Group reviewed the proposal presented by Iron Mechanical totaling $70,641.00 for the replacement of the two (2) packaged units.

Included in the cost is an amount for two (2) replacement in-kind ten (10) ton Bryant packaged units, high voltage electrical equipment, gas piping, thermostat wiring, and condensation drain line piping. We submit that these components are required to complete the replacement, and the costs are fair and reasonable.

Loss Solutions Group has reviewed the labor costs for the vendor to diagnose the damage and to perform the replacement, along with their travel expenses. We submit that these amounts are fair and reasonable to complete the scope of work as presented to us.

Note: The vendor decided to replace the Trane-branded units with Bryant-branded units. Both brands are produced by Carrier Global Corporation in the same manufacturing facilities and share many interchangeable internal components. Since Bryant is comparable in quality to Trane, we do not expect a significant price difference between the two (2) brands.

RCV

Loss Solutions Group submits an amount of $70,641.00 (RCV) as being fair and reasonable to return the insured to a pre-loss condition. A further breakdown of the pricing is available in the attached spreadsheet.

© 2022 by Loss Solutions Group, LLC. All rights reserved.

ACV

Loss Solutions Group submits an actual cash value (ACV) amount of $34,791.00 based on linear age depreciation of the materials only. We estimate the average life expectancy of the equipment to be around twenty (20) years.

Salvage

Loss Solutions Group submits that there is little to no salvage value associated with this claimed event.

Summary:

Loss Solutions Group's findings herein are based upon all information that was available at the time of this writing. The opinions are based upon reviewed documentation, interviews, research, experience, historical references, training and education.

1. The insured, Spare Time Inc., reported that their two (2) Trane-branded ten (10) ton packaged HVAC units sustained damage during a vandalism/theft event on December 24, 2025. A total amount of $70,641.00 was presented.

2. The insured reported that the affected equipment was around twenty (20) years old and in average condition at the time of the claimed event.

3. Loss Solutions Group submits an amount of $70,641.00 (RCV) as being fair and reasonable to return the insured to a pre-loss condition. A further breakdown of the pricing is available in the attached spreadsheet.

4. Loss Solutions Group submits an ACV amount of $34,791.00 based on linear age depreciation of the materials only.

5. Loss Solutions Group submits that there is little to no salvage value associated with this claimed event.

© 2022 by Loss Solutions Group, LLC. All rights reserved.

If you have any questions or if you need any additional information, please feel free to contact Tanner Beuret at (866) 899-8756 ext. 755, or via email at tbeuret@losssolutionsgroup.com. Team Leader Nick Ramos can be reached at (866) 899-8756 ext. 724, or via email at nramos@losssolutionsgroup.com.

Best regards,

Tanner Beuret
Technical Consultant
Loss Solutions Group, LLC

© 2022 by Loss Solutions Group, LLC. All rights reserved.

INSURED: SPARE TIME INC.
LSG MATTER #: 426600.4162-00
CLAIM #: 85-00893419
DATE OF LOSS: 12/24/2025
CAUSE OF LOSS: VANDALISM / THEFT

IRON MECHANICAL (916-347-6292) ESTIMATE # 25-SP-495 (REPLACEMENT OF RTU 1-G & 1-H)													
REF #	ITEM	CLAIM PRESENTED			LSG RESEARCHED RCV			AGE (YEARS)	USEFUL LIFE (YEARS)	ACV (MAX DEPRECIATION 75%)	DEPRECIATION	CONDITION	NOTES
		QTY	UNIT COST	TOTAL	QTY	UNIT COST	TOTAL						
1	DEMO AND REPLACE TWO 10 TON CARRIER UNITS.	1	$ 70,641.00	$ 70,641.00	0	$ -	$ -	N/A	N/A	$ -	$ -	N/A	DEMO AND REPLACE TWO 10 TON CARRIER UNITS. THIS PRICE WAS PROVIDED TO US IN A LUMP SUM COST. WITH HELP FROM THE VENDOR WE WERE ABLE TO BREAK THIS COST DOWN AS FOLLOWS.
2	BRYANT 10 TON RTUS	0	$ -	$ -	2	$ 22,100.00	$ 44,200.00	20	20	$ 11,050.00	$ 33,150.00	AVERAGE	TWO REPLACEMENT BRYANT BRAND 10 TON RTUS. GAS HEAT ELECTRIC COOLING. WITH AN ADDED VENDOR MARK UP ON MATERIALS.
3	TIE INTO EXISTING GAS PIPING	0	$ -	$ -	2	$ 100.00	$ 200.00	20	20	$ 50.00	$ 150.00	AVERAGE	TIE INTO EXISTING GAS PIPING. COPPER CONNECTIONS, PIPING, PIPE-DOPE, ETC.
4	HIGH VOLTAGE ELECTRICAL EQUIPMENT	0	$ -	$ -	2	$ 1,500.00	$ 3,000.00	20	20	$ 750.00	$ 2,250.00	AVERAGE	NEW DISCONNECTS, FUSES, CONDUIT, BREAKERS.
5	RECONNECT WIRING AND THERMOSTAT	0	$ -	$ -	2	$ 100.00	$ 200.00	20	20	$ 50.00	$ 150.00	AVERAGE	RECONNECTING AND PULLING NEW WIRE FOR THERMOSTAT.
6	NEW CONDENSATE PIPING	0	$ -	$ -	2	$ 100.00	$ 200.00	20	20	$ 50.00	$ 150.00	AVERAGE	NEW CONDENSATION DRAIN LINES.
7	DEMO AND REMOVE DAMAGED UNITS	0	$ -	$ -	1	$ 1,500.00	$ 1,500.00	N/A	N/A	$ 1,500.00	$ -	N/A	DISPOSAL AND RECYCLING.
8	CRANE AND RIGGING	0	$ -	$ -	1	$ 2,141.00	$ 2,141.00	N/A	N/A	$ 2,141.00	$ -	N/A	CRANE AND RIGGING TO REMOVE THE DAMAGED UNITS AND PLACE THE TWO NEW UNITS.

© 2022 by Loss Solutions Group, LLC. All rights reserved.

INSURED: SPARE TIME INC.
LSG MATTER #: 426600.4162-00
CLAIM #: 85-00893419
DATE OF LOSS: 12/24/2025
CAUSE OF LOSS: VANDALISM / THEFT

IRON MECHANICAL (916-347-6292) ESTIMATE # 25-SP-495 (REPLACEMENT OF RTU 1-G & 1-H)													
REF #	ITEM	CLAIM PRESENTED			LSG RESEARCHED RCV			AGE (YEARS)	USEFUL LIFE (YEARS)	ACV (MAX DEPRECIATION 75%)	DEPRECIATION	CONDITION	NOTES
		QTY	UNIT COST	TOTAL	QTY	UNIT COST	TOTAL						
9	LABOR FOR THE REPLACEMENT	0	$ -	$ -	96	$ 200.00	$ 19,200.00	N/A	N/A	$ 19,200.00	$ -	N/A	FOUR TECHNICIANS FOR 3 DAYS OF WORK.
SUB-TOTAL				**$ 70,641.00**			**$ 70,641.00**			**$ 34,791.00**	**$ 35,850.00**		
SALES TAX				$ -			$ -			$ -	$ -		
TOTAL				**$ 70,641.00**			**$ 70,641.00**			**$ 34,791.00**	**$ 35,850.00**		

TOTAL PRESENTED	**$ 70,641.00**
TOTAL RESEARCHED RCV	**$ 70,641.00**
TOTAL ACV	**$ 34,791.00**
TOTAL DEPRECIATION	**$ 35,850.00**

© 2022 by Loss Solutions Group, LLC. All rights reserved.

Spare Time Indoor Pickleball & Tennis Center

11205 Pyrites Way

Gold River Ca, 95670

Initial Event

- Occurred 12/24/2025
- Two street side units were damaged beyond repair
- Sacramento County Sheriff's Office Report **# 25-393787**
- **New unit lead time 4-6 weeks**

Additional Event

- Occurred 12/26/2025
- One-unit total loss, one unit repairable
- Sacramento County Sheriff's Office Report **# 25-395402**
- **New unit lead time 4-6 weeks / repairs 2-3 weeks for parts**

Attachments

- Iron Mechanical Inspection Reports for All Units
- Iron Mechanical Estimates for All Units
- Iron Mechanical Cost Breakdown Sheet
- Photos of Damaged Units / Safeguard Measures Taken
- Police Report Numbers
- Fence Damage Estimate

Additional Information Request

Please contact:

Chris Vandyke – Corporate Maintenance Director – Spare Time Inc.

Direct Line (209) 371-9839

Equipment Detail

1-C

Trane

Model - YHC120A4ELA34

SN – 839101616L

Damage – Repairable

1-E

American Standard

Model - YSC120F4ELA1W

SN – 170810855L

Damage – Total Loss

1 – G

Trane

Model – YSC120H4RLA

SN – 181814468L

Damage – Total Loss

1-H

Trane

Model – YSC120H4RLA1DQY

SN – 181911562L

Damage – Total Loss

Chris Vandyke

From: Michael Dobkin <mdobkin@ironmechanical.com>
Sent: Friday, January 2, 2026 2:21 PM
To: Chris Vandyke
Cc: Michael Dobkin
Subject: Fw: Iron Mechanical: Updated Replacement/Repair Proposals: Indoor Tennis and Pickle Ball Sports Club
Attachments: Outlook-IM logo_fi; estimate_1008251658.pdf; estimate_25-sp-495.pdf; estimate_26-sp-008.pdf

COST SHEET

Caution! This message was sent from outside your organization. Allow sender | Block sender

Hi Chris,

Please see all three proposals for replacing and repairing the vandalized units at Indoor Tennis.

Unit # AC 1-G and 1-H (Replacement)
*Quote 25-sp-495

Estimate

Description	Qty
HVAC BID	1.00

$70,641.00
Estimate Total:

Unit # AC 1-E (Replacement)
*Quote 26-sp-008

Estimate

Description	Qty	Unit Cost
HVAC BID	1.00	$35,320.00

$35,320.00

Unit # AC 1-C
*Quote 1008251658

Estimate

Description	Qty
HVAC Compressor Replacements and Piping Repairs	1.00

$11,556.00
Estimate Total:

Michael Dobkin
Construction Services
916.347.6292

IRON MECHANICAL
Performance & Quality
Click here to learn more about Copper for Kids

IRON MECHANICAL
721 North B Street, Suite 100
Sacramento, CA 95811
(833) IRO-NSVC / (916) 341-3530
Service@ironmechanical.com

Estimate

ESTIMATE#	25-SP-495
DATE	12/29/2025
PO#	

CUSTOMER	SERVICE LOCATION
Spare Time Sports 11205 Pyrites Way Gold River CA 95670 (916) 635-3358	Spare Time Sports 11205 Pyrites Way Gold River CA 95670 (916) 635-3358

DESCRIPTION

SCOPE OF WORK: Replace two (2) existing 10-ton ground-mounted, side-discharge packaged HVAC units that were vandalized and removed for scrap.

INCLUSIONS:

- Demo and haul-off what's left of the existing RTUs (Units 1G/1H)
- Crane service and rigging
- Furnish and install (2) new ground-mounted, side-discharge Bryant 10-ton RTUs (replacement-in-kind)
- Tie-in to existing gas piping (alter as required)
-All high voltage electrical to units only (provide new disconnects, fuses, conduit, and breakers as required)
- Reconnect to existing control wiring and reuse existing thermostats
- Install new condensate piping (Terminate to existing location)
- Unit labeling and identification
- Startup & verify proper operation

EXCLUSIONS:

- Permits and associated fees
- Bond premiums
- Engineering or energy compliance documentation
- Economizers, outdoor air systems, or energy code upgrades
- Controls, BAS/BMS integration, programming, or re-commissioning
- Waterproofing
- Fire protection systems or tie-ins
- Roofing or roof penetrations
- Modifications or upgrades to existing ductwork other than transitioning to new equipment
- Duct cleaning
- Structural supports or pads
- Conflicts with existing utilities
- Painting of piping, conduit, or ductwork
- Overtime, night, or weekend work
- Unforeseen conditions
- Patching, painting, or surface restoration
- Temporary heating or cooling
- Testing, adjusting, and balancing (TAB)

QUALIFICATIONS:

- Scope is based on replacement-in-kind of existing equipment
- Units do not include economizers; any economizers or energy code upgrades required by the Authority Having Jurisdiction shall be provided via change order if required
- Existing thermostats and control wiring are assumed functional and compatible (Additional pricing will be provided to replace if required)

- Pricing is valid for 30 days
- If off-hours or weekend work is required, additional pricing will be provided

Estimate

Description	Qty	Rate	Total
HVAC BID	1.00	70,641.00	70,641.00

CUSTOMER MESSAGE

Iron Mechanical is pleased to provide you with this proposed estimate. Please feel free to call, email or text with questions.

Estimate Total: $70,641.00

PRE-WORK SIGNATURE

Signed By:

IRON MECHANICAL

721 North B Street, Suite 100
Sacramento, CA 95811
(833) IRO-NSVC / (916) 341-3530
Service@ironmechanical.com

Estimate

ESTIMATE#	26-SP-008
DATE	01/02/2026
PO#	

CUSTOMER	SERVICE LOCATION
Spare Time Sports 11205 Pyrites Way Gold River CA 95670 (209) 371-9839	Spare Time Sports 11205 Pyrites Way Gold River CA 95670 (209) 371-9839

DESCRIPTION

SCOPE OF WORK: Replace existing 10-ton ground-mounted, side-discharge packaged HVAC unit that was vandalized and removed for scrap.

INCLUSIONS:

- Demo and haul-off what's left of the existing RTU (Units 1E)
- Crane service and rigging
- Furnish and install new ground-mounted, side-discharge Bryant 10-ton RTU (replacement-in-kind) *4 week lead time from the factory
- Tie-in to existing gas piping (alter as required)
-All high voltage electrical to unit only (provide new disconnect, fuses, conduit, and breaker as required)
- Reconnect to existing control wiring and reuse existing thermostat
- Install new condensate piping (Terminate to existing location)
- Unit labeling and identification
- Startup & verify proper operation

EXCLUSIONS:

- Permits and associated fees
- Bond premiums
- Engineering or energy compliance documentation
- Economizers, outdoor air systems, or energy code upgrades
- Controls, BAS/BMS integration, programming, or re-commissioning
- Waterproofing
- Fire protection systems or tie-ins
- Roofing or roof penetrations
- Modifications or upgrades to existing ductwork other than transitioning to new equipment
- Duct cleaning
- Structural supports or pads
- Conflicts with existing utilities
- Painting of piping, conduit, or ductwork
- Overtime, night, or weekend work
- Unforeseen conditions
- Patching, painting, or surface restoration
- Temporary heating or cooling
- Testing, adjusting, and balancing (TAB)

QUALIFICATIONS:

- Scope is based on replacement-in-kind of existing equipment
- Units do not include economizer; any economizers or energy code upgrades required by the Authority Having Jurisdiction shall be provided via change order if required
- Existing thermostat and control wiring are assumed functional and compatible (Additional pricing will be provided to replace if required)

- Pricing is valid for 30 days
- If off-hours or weekend work is required, additional pricing will be provided

Estimate

Description	Qty	Rate	Total
HVAC BID	1.00	35,320.00	35,320.00

CUSTOMER MESSAGE

Iron Mechanical is pleased to provide you with this proposed estimate. Please feel free to call, email or text with questions.

Estimate Total: $35,320.00

PRE-WORK SIGNATURE

Signed By:

IRON MECHANICAL

721 North B Street, Suite 100
Sacramento, CA 95811
(833) IRO-NSVC / (916) 341-3530
Service@ironmechanical.com

Estimate

ESTIMATE#	1008251658
DATE	12/30/2025
PO#	

CUSTOMER	SERVICE LOCATION
Spare Time Sports 11205 Pyrites Way Gold River CA 95670 (209) 371-9839	Spare Time Sports 11205 Pyrites Way Gold River CA 95670 (209) 371-9839

DESCRIPTION

Scope of Work:

Unit - AC 1C
Location: Rear Front East (inside back cage)
Brand: Trane

- (2) Remove and Install Compressors
- (2) Remove and Install Liquid Line Dryers
- R 407C Refrigerant Purge and Recharge to factory specs
- Repair Damaged Suction Line Piping
- Repair Damaged Discharge and Liquid Line Piping
- Install New Filters
- flush system with RX-11 to remove contaminants
- pull triple evacuation of system to 500-microns
- hold 15 minute test
- Clean Out All Cabinets and Enclosures
- Confirm Start Up and Operation
- record readings

Additional Inclusions:
- Pre-job walk inspection report
- Repair any damaged or cut wires

Exclusions:

- Unforeseen issues with evaporator coil
- Unforeseen issues with condensing coil
- Any issue the could not be identified during unit post-vandalism inspections

Estimate

Description	Qty	Rate	Total
HVAC Compressor Replacements and Piping Repairs	1.00	11,556.00	11,556.00

CUSTOMER MESSAGE
Iron Mechanical is pleased to provide you with this proposed estimate. Please feel free to call, email or text with questions.

Estimate Total: **$11,556.00**

PRE-WORK SIGNATURE

Signed By:

HVAC Equipment Inspection

Prepared For: Spare time Sports Inc.
Location: 11205 Pyrites Way Gold Rive, Ca 95760
Date: 12-29-2025
Prepared By: Michael Dobkin / Iron Mechanical

To Whom It May Concern,

Please see our equipment inspection report following our recent facility inspection on December 26, 2025. The damage identified during inspection is consistent with intentional vandalism, including removal of major components, cutting of refrigerant and electrical lines, and exposure of internal systems to weather conditions.

Court #5 – Unit 1H

- **Location:** Front West Unit (Street Side)
- **Capacity:** 10-Ton Unit (120,000 BTU)
- **Brand:** Trane

This unit sustained extensive vandalism damage. The condenser coil has been removed, refrigerant line sets were cut, and the compressor has been left open to the atmosphere, resulting in visible rust buildup. Multiple exterior panels are missing, including the data plate panel. Electrical wiring to the condenser fan motor has been cut, and electrical components have been exposed to rain. The unit has been inspected and condemned.

Observed Conditions:

- Condenser coil removed
- Refrigerant line sets cut
- Compressor exposed to atmosphere with rust buildup

- Electrical wiring cut (condenser fan motor)
- Electrical components exposed to rain
- Multiple panels missing, including data plate panel
- Blower motor intact
- Unit condemned

Replacement Recommendation / Requirement:
Due to the removal of critical components, prolonged exposure of the compressor and electrical systems to moisture, and the absence of required identification and safety panels, this unit is not repairable. Replacement of the entire HVAC unit is required to restore safe and reliable operation. Repair is not economically or mechanically feasible.

Court #7 – Unit 1H

- **Location:** Rear West Unit (Street Side)
- **Capacity:** 10-Ton Unit (120,000 BTU)
- **Brand:** Trane

This unit sustained similar vandalism damage. Both the evaporator coil and condenser coil have been removed. Refrigerant line sets were cut, leaving the compressor exposed to the atmosphere with visible rust buildup. Electrical wiring to the condenser fan motor has been cut, and multiple exterior panels, including the data plate panel, are missing. Electrical components have been exposed to rain. This unit has been inspected and condemned.

Observed Conditions:

- Evaporator coil removed
- Condenser coil removed
- Refrigerant line sets cut

- Compressor exposed to atmosphere with rust buildup
- Electrical wiring cut (condenser fan motor)
- Electrical components exposed to rain
- Multiple panels missing, including data plate panel
- Blower motor intact
- Unit condemned

Replacement Recommendation / Requirement:
Given the extensive vandalism, loss of major refrigeration components, moisture intrusion into mechanical and electrical systems, and the condemned status of the unit, full replacement of this HVAC unit is required. The unit cannot be safely repaired or returned to service.

Conclusion:

The damage to the above-referenced units is consistent with vandalism and not the result of normal wear and tear. Replacement of the condemned equipment is necessary to restore HVAC functionality and ensure safe operation at the property.

Please advise if additional documentation, photographs and/or cost estimates are needed.

Michael Dobkin

Construction Services - Account Manager

916.347.6292

IRON MECHANICAL

Performance & Quality

HVAC Equipment Inspection

Prepared For: Spare Time Sports Inc.
Location: 11205 Pyrites Way Gold Rive, Ca 95760
Date: 12-29-2025
Prepared By: Michael Dobkin / Iron Mechanical

To Whom It May Concern,

Please see our equipment inspection report following our recent facility inspection **on December 29, 2025**. The damage identified during inspection is consistent with intentional vandalism, including the removal of several panels, filters and intentional cutting of refrigerant line sets, leaving critical system components damaged and exposed to the atmosphere and moisture.

Unit AC 1E

- **Brand:** American Standard
- **Capacity:** 10-Ton Unit (120,000 BTU)
- **Location:** Rear Front West (inside back cage)

This unit sustained extensive vandalism damage. The condenser coil and evaporator coil line sets have been cut and crimped beyond repair requiring new coils. The refrigerant line sets were cut to each compressor leaving both compressors open to the atmosphere, resulting in visible rust buildup. The unit has been inspected and condemned.

Observed Conditions:

- Condenser coil line sets cut and crimped
- Evaporator coil line sets cut and crimped
- Refrigerant line sets cut
- Compressors exposed to atmosphere with rust buildup

- Electrical wiring cut (condenser fan motor)
- Electrical components exposed to rain
- Blower motor intact
- Unit condemned

Replacement Recommendation / Requirement:
Due to the removal of critical components, prolonged exposure of the compressor and electrical systems to moisture, this unit is not repairable. Replacement of the entire HVAC unit is required to restore safe and reliable operation. Repair is not economically or mechanically feasible.

Unit AC 1C

- **Brand:** Trane
- **Location:** Rear Front East (inside back cage)

This unit sustained similar vandalism damage. The refrigerant line sets were cut, leaving the compressor open to atmosphere and moisture. This exposure will lead to moisture retention and internal corrosion, necessitating major repairs and component replacement.

Recommended Repairs and Replacement for AC 1C:

- Replacement of (2) compressor
- Replacement of (2) liquid line drier
- Refrigerant purge and recharge with R-407C
- Repair of damaged suction line piping
- Repair of damaged discharge line piping
- Installation of new filters
- Cleaning of all cabinets and enclosures
- Confirmation of system start-up and proper operation

Conclusion:

The damage to both units is consistent with vandalism and not normal wear and tear. Replacement and repairs are necessary to restore the HVAC systems to safe and functional operating condition.

Please let me know if additional documentation, estimates and photographs are needed.

Michael Dobkin

Construction Services - Account Manager

916.347.6292

IRON MECHANICAL

Performance & Quality

TOTAL LOSS UNIT - BACK WEST UNIT
FRONT #1

TOTAL LOSS UNIT - FRONT WEST UNIT
FRONT #2

REPAIR UNIT EAST SIDE BACK #2 #1

#2

TOTAL LOSS UNIT #3 WEST SIDE BACK

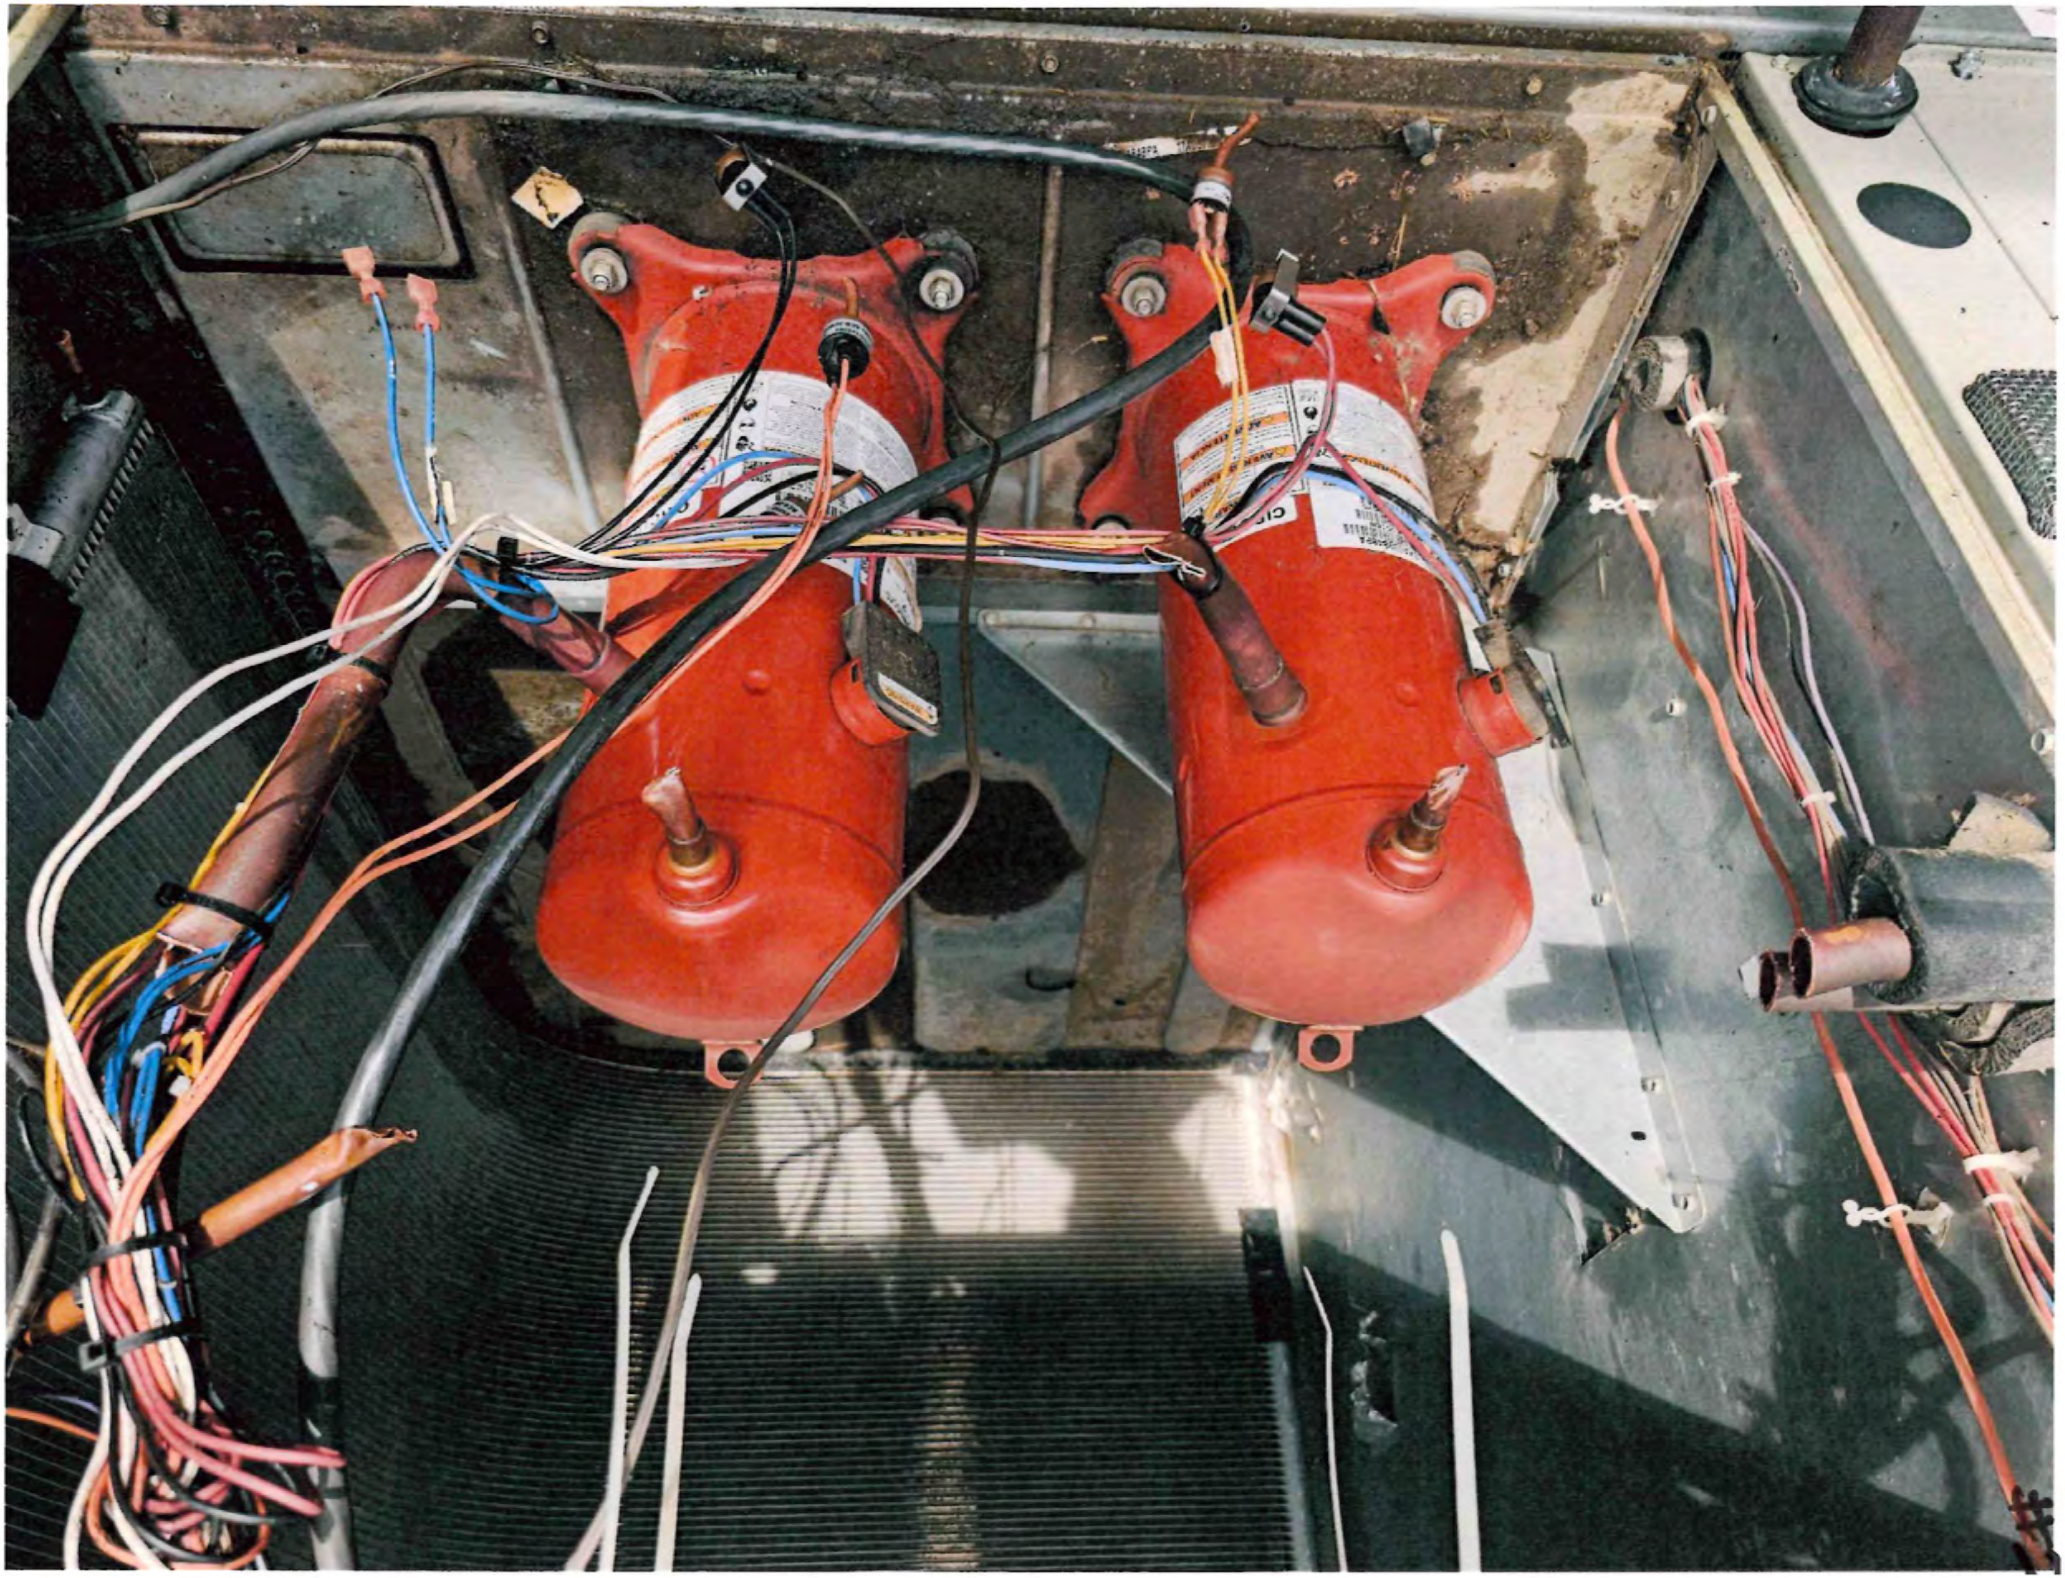

#3

#4

PRESSURES MEASURED TAKEN

SAFEGUARD MEASURES TAKEN

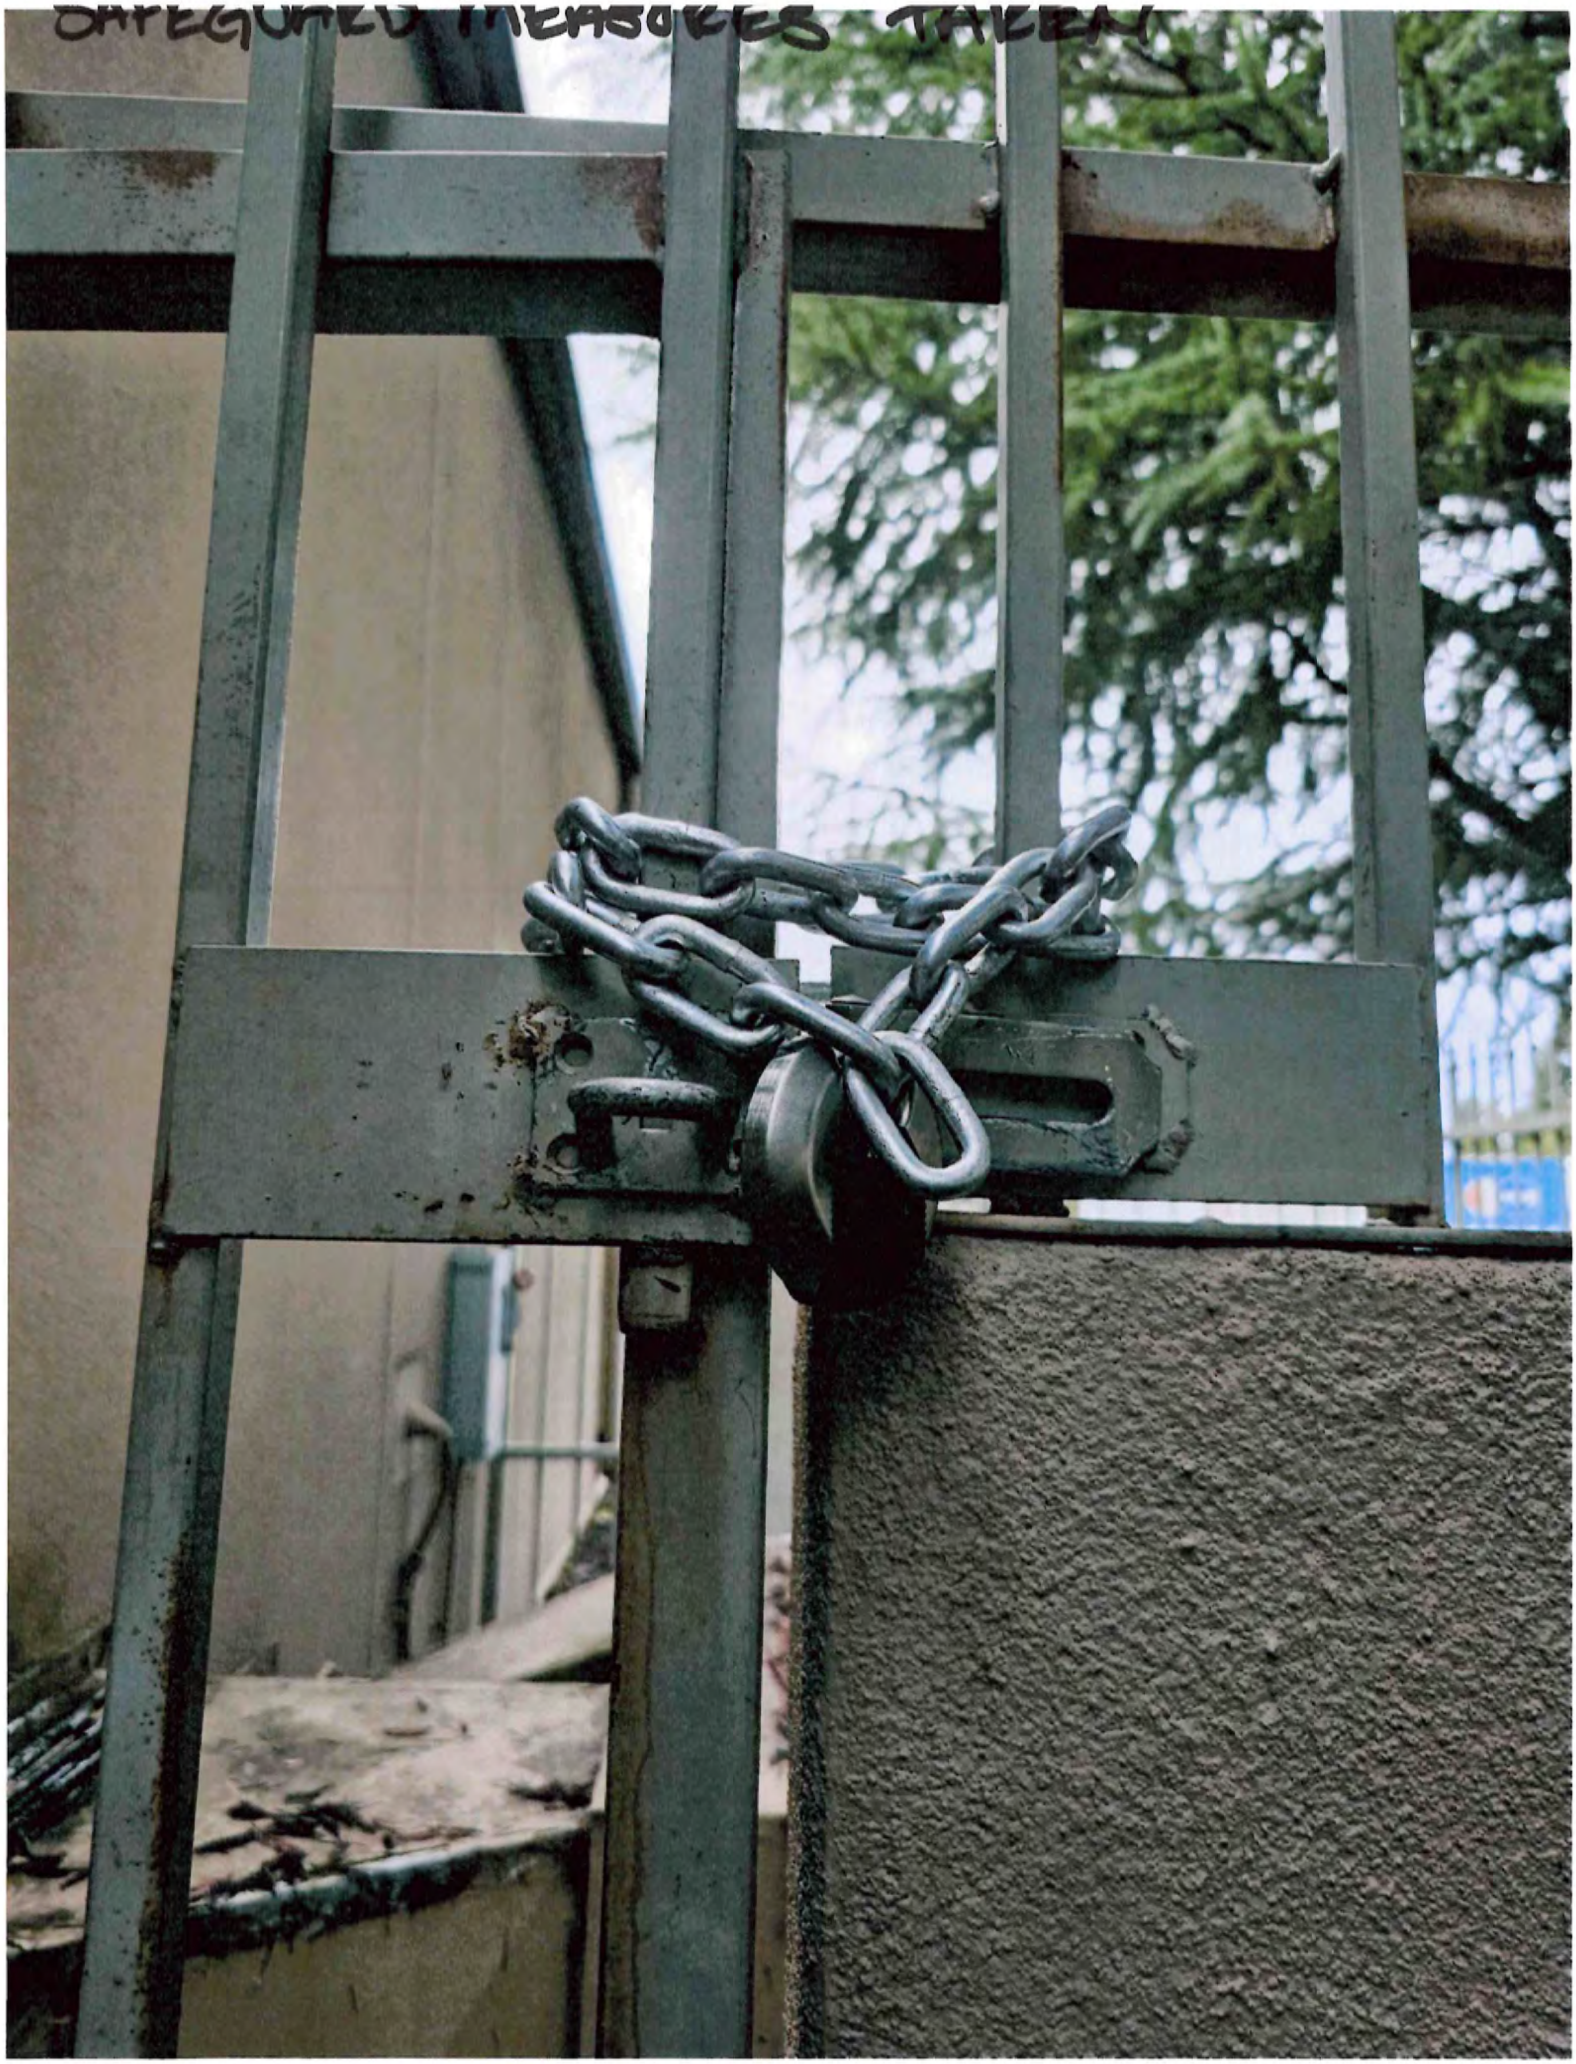

Home | Shop | Rep Line Card | Representatives | Refund And Returns Policy | Privacy Policy | My Account | My Cart | Contact | News | Privacy Policy

Search products...

Walkair

Home / Commercial Equipment / Packaged Rooftop / 582KP12N224A3A0AA Bryant Legacy – 10 Ton, 224,000 BTUH, Packaged Rooftop Gas Heat & Electric Cooling Unit R-410A (208/230-3-60)

582KP12N224A3A0AA Bryant Legacy – 10 Ton, 224,000 BTUH, Packaged Rooftop Gas Heat & Electric Cooling Unit R-410A (208/230-3-60)

$17,017.39

E-Mail [illegible] to confirm availability or for volume discounts.

1 Add to cart

Buy with Pay | G Pay •••• 3100

PayPal

venmo

Pay Later

SKU: 582KP12N224A3A0AA Category: Packaged Rooftops Tag: 582KP12N224A3A0AA

Description

Description

582KP12N224A3A0AA Bryant Legacy – 10 Ton, 224,000 BTUH, Packaged Rooftop Gas Heat & Electric Cooling Unit R-410A (208/230-3-60) – E-Mail: [illegible] to confirm availability or for volume discounts.

SupplyHouse.com

Search for a product, brand, or SKU...

CONTACT & SUPPORT • Live Chat: Online Now

SIGN IN | CART

Plumbing | Heating | HVAC | Electrical | PEX | Pipe | Fittings | Valves | Tools | Resources | Our Team

TRADEMASTER PROGRAM FOR THE PROS — ARE YOU A PRO? Join for FREE! Free Shipping | Lower Prices | Free Returns | APPLY NOW

Hover image to zoom

Home / Plumbing Supplies / Tools / Soldering Supplies / Brazing Rods

Stay-Silv 15% Flat Brazing Rods (28 Sticks per Tube)

Brand: Harris SKU: 15620F1 (10) Q&A: (0)

− + $132.37 each

ADD TO CART

In Stock Get 366 Mon, Dec 23

FastTrack: Order by 5PM, receive Monday. Details

TurboTrack: Order today, get by 12PM Monday. Time Slots

Free Shipping This item ships free

Easy Returns No restocking fee for 90 days

Product Highlights

15% Silver, 5% Phosphorus, 80% Copper

1 lb

Description

SupplyHouse.com

Search for a product, brand, or SKU...

CONTACT & SUPPORT
Live Chat: Online Now

SIGN IN | CART

Plumbing | Heating | HVAC | Electrical | PEX | Pipe | Fittings | Valves | Tools | Resources | Our Team

TRADEMASTER PROGRAM FOR THE PROS
ARE YOU A PRO? Join for FREE!
Free Shipping | Lower Prices | Free Returns
APPLY NOW
Less than 3 minutes!

Hover image to zoom

Home > Heating Supplies & Parts > Pipe Insulation > K-Flex Pipe Insulation

1-1/8" Pipe (O.D.) x 1" Wall Titan Pipe Insulation, 6'

Brand: K-Flex SKU: 6RSR100118 (0) Q&A: (0)

$51.24 each

ADD TO CART

In Stock Get 11 Tue, Jun 4

FastTrack
Order today, receive Tuesday
Details

TurboTrack
Order today, get by 12PM Tomorrow
Time Slots

MANUALS (1)
Product Overview

Free Shipping On orders over $99
Easy Returns No restocking fee for 90 days

Product Highlights

1" | 72" Length | 3-1/8"

AMERICAN Copper & Brass, LLC Since 1986

All categories | What are you looking for?

800.624.8296 | LOGIN

QUICK ORDER | LAST CHANCE DEALS | LATEST BULK DISCOUNTS | PRODUCT CATEGORIES | BRANDS | CUSTOMER SERVICE | CONTACT

Home > 3/4" Type L Copper Pipe - 60' Soft Copper Coil

3/4" TYPE L COPPER PIPE - 60' SOFT COPPER COIL

SKU 34L60

$347.95

4 interest-free installments, or from **$31.41**/mo with shop Pay Check your purchasing power

by CAMBRIDGE-LEE IND LLC

Availability: Only 1 left!

Vendor: CAMBRIDGE-LEE IND LLC| **Vendor #** 320524 Cambridge-Lee 60' soft coil of 3/4" type L copper pipe. **Product Type**: Water Tube Type L **Applications**: Domestic Water Service, Fire Protection, Solar, Fuel Oil, HVAC, Natural Gas **Temper**: Soft **Length**: 60' Coil **Color Code**: Blue **Specification**: C12200, ASTM B-88 **SSID:** 80133

Quantity

− 1 +

ADD TO CART

Inventory Blowout
Once it's gone, it's gone!

REBATE CENTER
SCRATCH, DENT, OR CLOSE OUT SPECIALS
COMPLETE SPLIT SYSTEMS (INDOOR/OUTDOOR)
MINI SPLIT DUCTLESS SYSTEMS WITH REMOTE
PACKAGE / MOBILE HOME / ROOFTOP UNIT
BARD WALL HUNG PACKAGE UNIT
COMMERCIAL EQUIPMENT

Home > Copper Lines & Fittings >

Copper Fittings Kit 1 3/8 & 5/8

Larger Photo | Email A Friend

Like 0 | Share

List Price: $180.00
Our Price: $155.00
You save $25.00!

Starting at $14/mo with affirm.
See if you qualify

Availability: Usually Ships in 2 to 3 Business Days
Product Code: 37128

Qty: 1

Add To Cart

Add To Wishlist

HVAC Parts Are Here!
Shop the top brands in the industry.

Take Parts Town on the Go!
Download the industry's #1 app today!

Partpredictor **Find the parts you need to fix equipment!**
Based on data from techs, powered by AI!

Partspin®

Real OEM Part

Lennox 22H54 Condensate Drain Trap Kit, 1", PVC

List Price: **$ 103.45**

Quantity Available:	1
Manufacturer:	Lennox
Manufacturer #:	22H54
Parts Town #:	LEN22H54
Units:	Each
Fits Models:	View Models List
California Residents:	Proposition 65 Warning

Ship It!
In Stock
Ships from Parts Town
My Price: $ 77.59

1 more purchase options for shipping

1

Log in to enable Quick Order

ADD TO CART

ADD TO MY PARTS | Share this Part

Help us improve by sharing your feedback.

theacoutlet

(888) 474 - 9966

Daikin 5 Ton 14 Seer Commercial Heat Pump (208/230V)

Model: DZ14SA0603A

$3,305.00

Starting at $207/mo or 0% APR with affirm.

QTY: 1 ADD TO CART

ACCESSORIES | DESCRIPTION | SPECIFICATIONS | DOCUMENTS | CUSTOMER REVIEWS

Anti-Vibration Rubber Pads

Model: ISO-2

$24.95

QTY: 1 ADD TO CART

Flexible Electric Supply Whip (1/2 in x 6 ft)

Model: 84136

$34.95

QTY: 1 ADD TO CART

Flexible Electric Supply Whip (3/4 in x 6 ft)

Model: 84138

$46.95

QTY: 1 ADD TO CART

ProStat Non-Programmable Thermostat (1H/1C)

Model: PRS3110

$64.95

QTY: 1 ADD TO CART

theacoutlet

(888) 474 - 9966

Daikin 5 Ton 14 Seer Commercial Heat Pump (208/230V)

Model: DZ14SA0603A

$3,305.00

Starting at $207/mo or 0% APR with affirm.

QTY: 1 ADD TO CART

ACCESSORIES | DESCRIPTION | SPECIFICATIONS | DOCUMENTS | CUSTOMER REVIEWS

Accessories

36 x 36 Polyolefin Condenser Pad

Model: EL3636-3

$99.00

QTY: 1 ADD TO CART

3 Ton - 5 Ton Copper Line Set (3/8 x 1 1/8 x 50 ft)

Model: CT38X50OD-CT118X50OD-6RX048118

$649.00

QTY: 1 ADD TO CART

3 Ton - 5 Ton Copper Line Set (3/8 x 7/8 x 50 ft)

Model: CT38X50OD-CT78X50OD-6RX048078

$499.00

QTY: 1 ADD TO CART

Rx11 Copper Line Set Flush Starter Kit

Model: 4300-08

$229.00

QTY: 1 ADD TO CART

5ft Ultra Thin Extension Cord with Charger, by TESSAN... 2,226 -26% $16.99 $22.99 prime
Sponsored

Roll over image to zoom in

Siemens GNF322RA 60-Amp, 3-Pole, 240V General Duty Compact Series Safety Switch, Non-Fusible, Outdoor

Visit the SIEMENS Store

4.5 ★★★★☆ 90 ratings

Amazon's Choice in Circuit Breaker Panel Safety Switches by SIEMENS

300+ bought in past month

-22% $69.99

List Price: $89.35

FREE Returns

Get $10 off instantly: Pay $59.99 $69.99 upon approval for the Amazon Store Card. No annual fee.

Available at a lower price from other sellers that may not offer free Prime shipping.

- 240-Volt rated, 3-Pole 3-Wire
- Quick make-break action
- Metal handle
- Provision for ECHA type hub
- Compact size for reduced space requirements

› See more product details

Customer ratings by feature

prime

Enjoy fast, free delivery, exclusive deals, and award-winning movies & TV shows with Prime

Try Prime and start saving today with **fast, free delivery**

Delivery | Pickup

$69.99

FREE Returns

FREE delivery **Saturday, May 25**

Or fastest delivery **Tuesday, May 21**. Order within 6 hrs 22 mins

Delivering to Southlake 76092 - Update location

Only 1 left in stock - order soon.

Add to Cart

Buy Now